

Fail Safe Mount (High Deflection) Type FRS

Product Features:

- 30kg - 3400kg
- Shear and Compression
- Failsafe Protection
- Compact Design
- Flexible Vertically
- Stable Horizontally
- Dome Cover for Protection
- Treated against corrosion



Ordering Code::

FRS - ()

FRS
()

- Fail Safe Mount (High Deflection)
- Refer table on page 2

Application:


- HVAC
- Industrial
- Multi Directional



Unit 9, 20 Harris Drive
Ottery Cape Town
South Africa
Contact: +27 21 703 8755
Email: sales@electrovent.co.za
Website: www.electrovent.co.za

ELECTROVENT

Fail Safe Mount FRS (HD) Selection

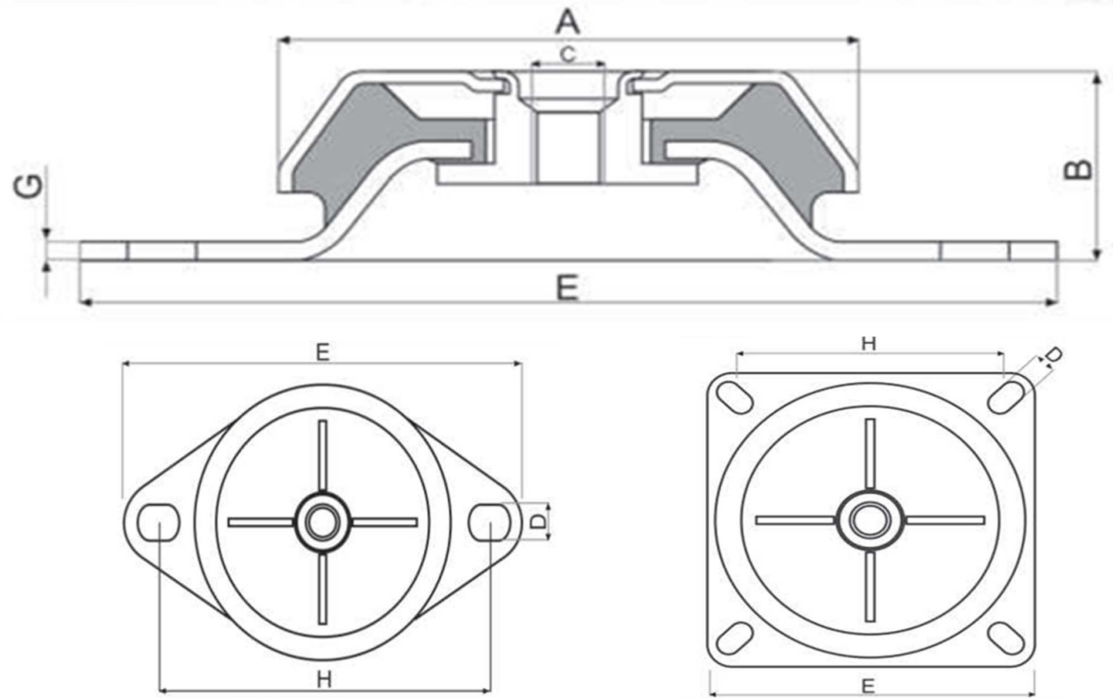

| | Shape | A | B | C | H | D | E | G |
|---------|--------|-----|-----|---------|---------|---------|-----|-----|
| FRS60 | Oval | 63 | 35 | M8-10 | 85 93 | 9x12 | 110 | 2.5 |
| FRS100 | Oval | 78 | 35 | M10 | 107 113 | 9x12 | 135 | 2.5 |
| FRS200 | Oval | 92 | 40 | M12 | 118 128 | 10x15 | 150 | 2.5 |
| FRS350 | Oval | 106 | 42 | M12 | 138 150 | 13x18 | 175 | 3 |
| FRS500 | Oval | 125 | 49 | M16 | 150 161 | 14x19 | 192 | 4 |
| FRS800 | Oval | 150 | 49 | M16 | 178 185 | 14x17 | 216 | 4 |
| FRS1800 | Square | 180 | 86 | M20 | 146 146 | 14.5 | 190 | 4 |
| FRS2200 | Square | 220 | 105 | M20-M24 | 180 180 | 17.5x20 | 220 | 5 |

| Load Rating | 40 Shore | 60 Shore | Load Rating | 40 Shore | 60 Shore |
|-------------|----------|----------|-------------|----------|----------|
| FRS60 | 30 | 60 | FRS500 | 230 | 430 |
| FRS100 | 70 | 140 | FRS800 | 340 | 700 |
| FRS200 | 110 | 170 | FRS1800 | 590 | 1300 |
| FRS350 | 170 | 130 | FRS2200 | 1700 | 3400 |