


2 Hour Rated Round Fire Damper Type EFD-R

Product Features:


- Manually or Electrically Operated
- 72°C Fusible Link Failsafe
- Minimum Size Ø100mm
- Maximum Size Ø400mm
- Depth vary from 350mm to 600mm
- Extended Shaft Option
- No Flanges
- Horizontal or Vertical Installation
- Inspection Port for Fusible Link

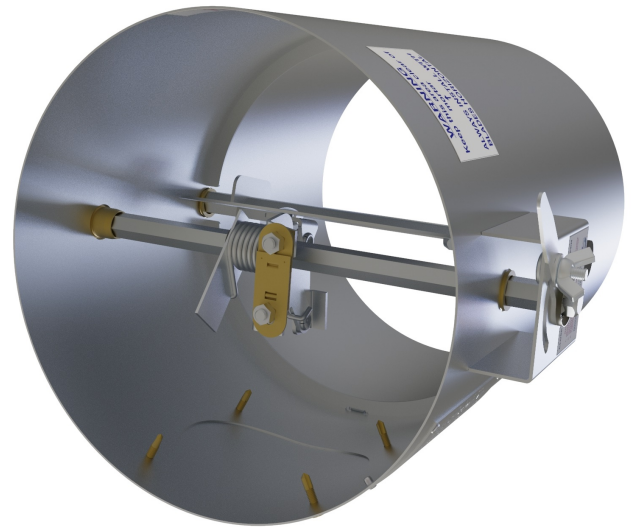

Ordering Code:

EFDR - L - () / Ø x d

- | | |
|----------|------------------------------------|
| EFDR - L | - Round Fire Damper with 72°C Link |
| (Q) | - Quadrant for Manual Operation |
| (ES) | - Extended Shaft |
| (24V) | - 24V Actuator (specify type) |
| (220V) | - 220V Actuator (specify type) |



Application:

- Duct Mounted
- SANS193
- 2 Hour Rated
- Combi Damper



Unit 9, 20 Harris Drive
Ottery Cape Town
South Africa
Contact: +27 21 703 8755
Email: sales@electrovent.co.za
Website: www.electrovent.co.za

ELECTROVENT